
ADJUSTABLE ALUMINUM GANTRY CRANE - AHA-15-10-8-PNU

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

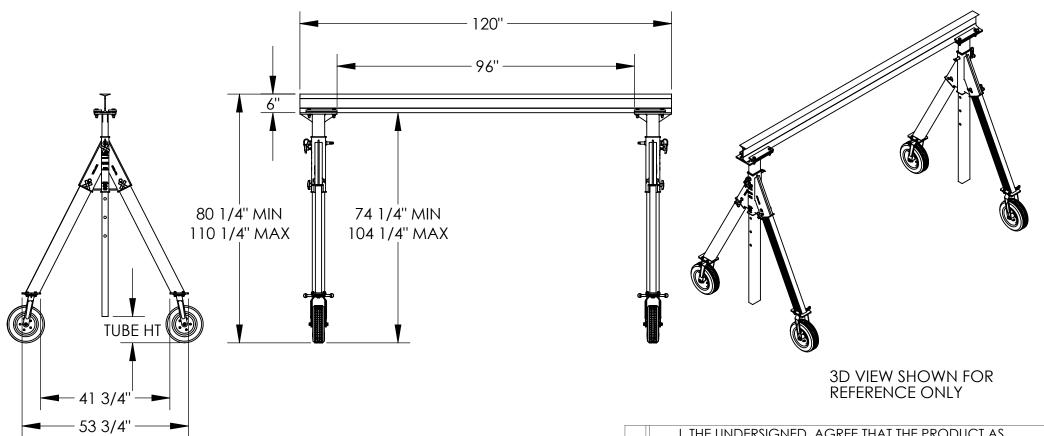

STANDARD FEATURES

MODEL NUMBER IS AHA-15-10-8-PNU CAPACITY IS 1.500 LBS. **OVERALL BASÉ WIDTH IS 53 3/4" USABLE BASE WIDTH IS 41 3/4" USABLE I-BEAM LENGTH IS 96" UNDER I-BEAM TO GROUND:** 74 1/4" MIN., 104 1/4" MAX. TUBE HEIGHT: 8 1/2" MIN., 38 1/2" MAX. I-BEAM HEIGHT IS 6" CASTERS: (4) Ø12" PNEUMATIC SWIVEL W/ FOUR POSITION LOCK

CAPACITY OF ATTACHMENTS MAY DERATE CAPACITY OF GANTRY CRANE

SPECIAL FEATURES **NONE**

ADDITIONAL OPTIONS:

A P

Ρ

R

0

V

Α

MANUAL TROLLIES	
1,000 # CAPACITY	
QIT-1	
E-MT-1	
E-MT-1-C	

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT A	ιS
REPRESENTED SATISFIES DESIGN AND DIMENSION	
REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY 1	Ο
CONFIRM PRODUCT AND INSTALLATION	
COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE	ΓΕ
AND LOCAL REGULATIONS AND STANDARDS.	
ALL SPECIAL UNITS ARE NON-RETURNA	BL

I I As marked

Signed: Date: LEAD TIME WILL START UPON RECEIPT

OF SIGNED APPROVAL DRAWING DISTRIBUTOR'S NAME: W.O.# X VESTIL MANUFACTURING

DRAWN BY: ND SALES: X DATE: 7/11/13

reference: X SCALE: 1:31 FILE NAME:

QUOTED LEAD TIME: Y QUOTE # 28-007-288

Χ