


# ADJUSTABLE ALUMINUM GANTRY CRANE - AHA-2-15-10

APPROX WEIGHT: 261.96 lbs.  
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*  
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

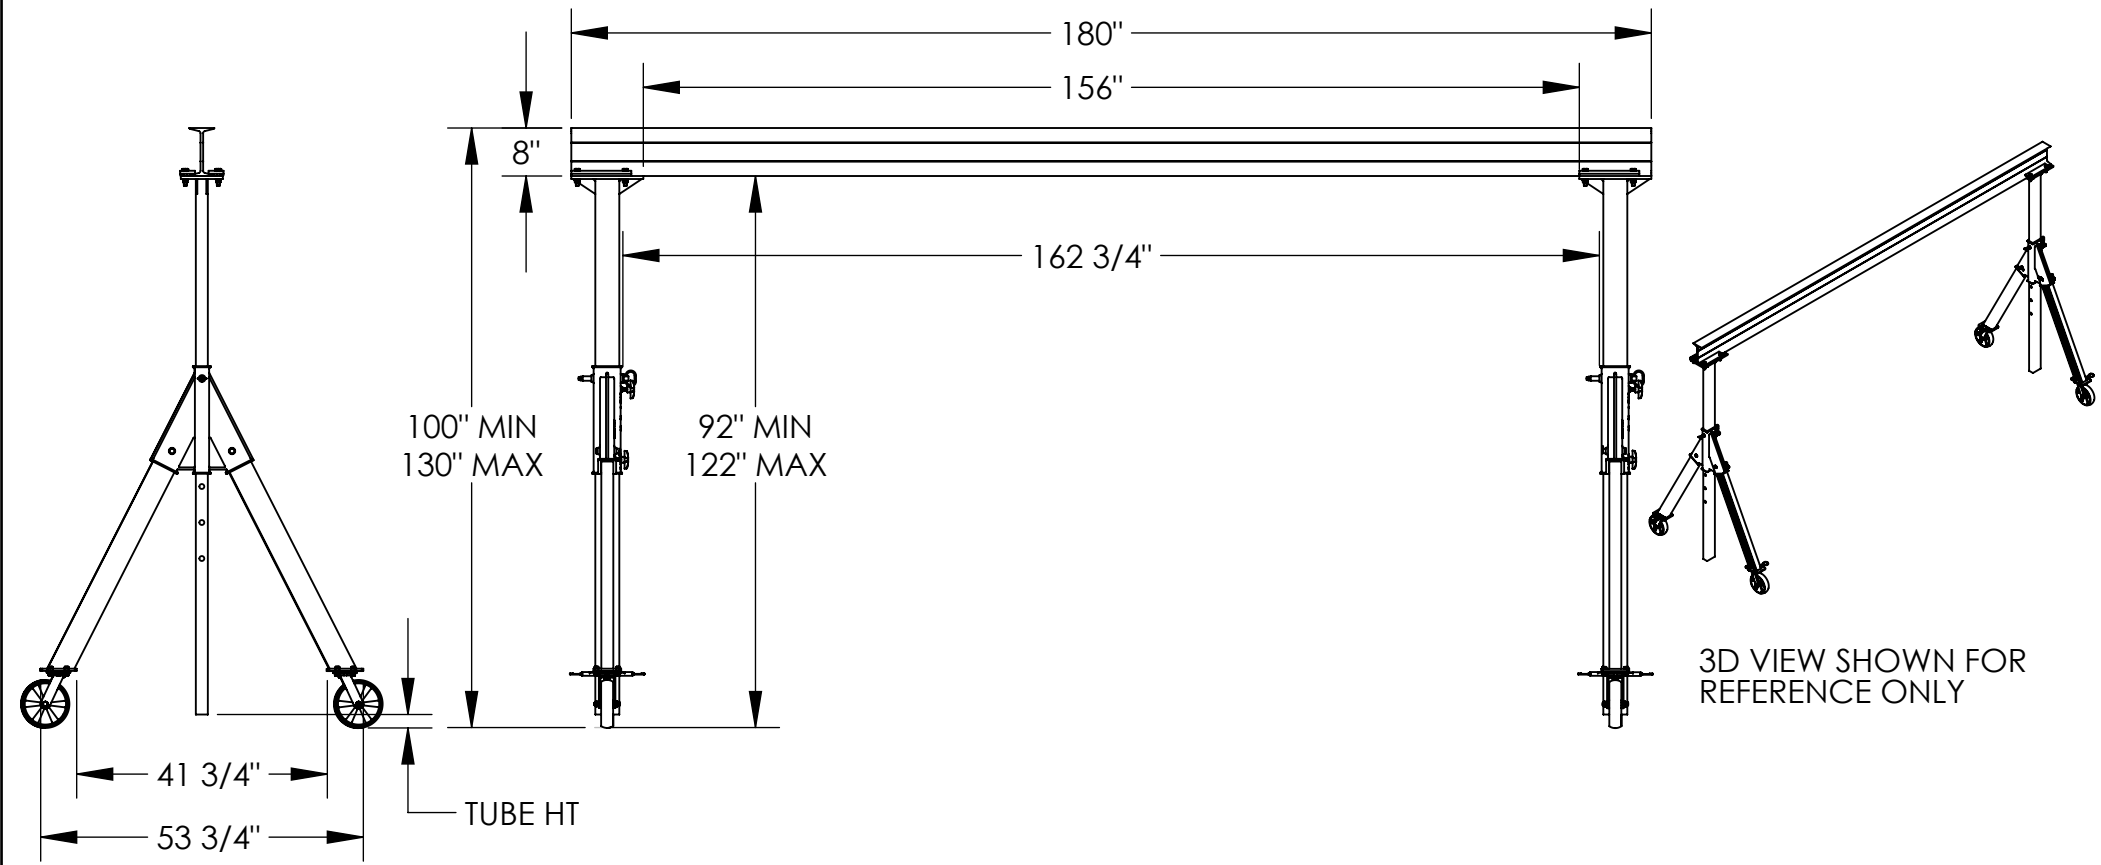

## STANDARD FEATURES

MODEL NUMBER IS AHA-2-15-10  
CAPACITY IS 2,000 LBS.  
OVERALL BASE WIDTH IS 53 3/4"  
USABLE BASE WIDTH IS 41 3/4"  
OVERALL BEAM LENGTH IS 180"  
USABLE BEAM LENGTH IS 156"  
I-BEAM HEIGHT IS 8"  
UNDER I-BEAM TO GROUND:  
92" MIN., 122" MAX.  
TUBE HEIGHT: 2 1/4" MIN., 32 1/4" MAX.  
STRADDLE LENGTH IS 162 3/4"  
Ø8" SWIVEL CASTERS W/4 POSITION LOCK

\*CAPACITY OF ATTACHMENTS MAY DERATE CAPACITY OF GANTRY CRANE\*

## SPECIAL FEATURES

NONE

ADDITIONAL AVAILABLE OPTIONS:

MANUAL TROLRIES	
1,000 # CAPACITY	2,000 # CAPACITY
QIT-1	QIT-2
E-MT-1	E-MT-2
E-MT-1-C	E-MT-2-C

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.  
**ALL SPECIAL UNITS ARE NON-RETURNABLE**  
[ ] As drawn [ ] As marked

Signed: \_\_\_\_\_ Date: \_\_\_\_\_

**LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING**

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: ND		W.O.#
DATE: 1/8/08		X
REFERENCE: X	SCALE: 1:32	SALES: X
QUOTED LEAD TIME: X	QUOTE # X	FILE NAME:
		28-007-194