
ALUMINUM GANTRY CRANE - AHA-4-15-8 *** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON.

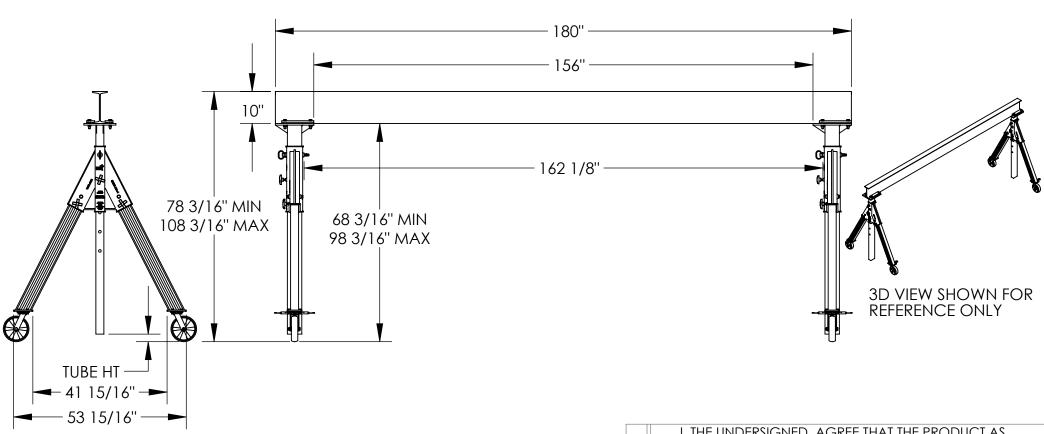

STANDARD FEATURES

MODEL NUMBER IS AHA-4-15-8 CAPACITY IS 4,000 LBS. **OVERALL BASÉ WIDTH IS 53 15/16" USABLE USABLE WIDTH IS 41 15/16" OVERALL I-BEAM LENGTH IS 180" USABLE I-BEAM LENGTH IS 156"** I-BEAM HEIGHT IS 10"

UNDER I-BEAM CLEARANCE IS 68 3/16" TO 98 3/16"

TUBE HEIGHT IS 2 1/4" MIN., 32 1/4" MAX.

STRADDLE LENGTH IS 162 1/8"

Ø8" SWIVEL CASTERS W/4 POSITION LOCK

SPECIAL FEATURES NONE

CAPACITY OF ATTACHMENTS MAY DERATE CAPACITY OF **GANTRY CRANE

ADDITIONAL AVAILABLE OPTIONS:

M	MANUAL TROLLIES					
1,000#	2,000#	4,000#				
CAPACITY	CAPACITY	CAPACITY				
QIT-1	QIT-2	QIT-4				
E-MT-1	E-MT-2	E-MT-2				
E-MT-1-C	E-MT-2-C	E-MT-4-C				

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE Ρ Ρ AND LOCAL REGULATIONS AND STANDARDS. R ALL SPECIAL UNITS ARE NON-RETURNABLE 0

[] As marked [] As drawn

Signed: Date: LEAD TIME WILL START UPON RECEIPT

OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:	P.O.# X		
			W.O.# X
DRAWN BY: ND	DATE: 3/2		SALES: X
reference: X	,	SCALE: 1:30	
QUOTED LEAD TIME: X	QUOTE #		28-007-229