

## ADJUSTABLE ALUMINUM GANTRY CRANE - AHA-6-10-8

APPROX WEIGHT: 349.40 lbs.

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

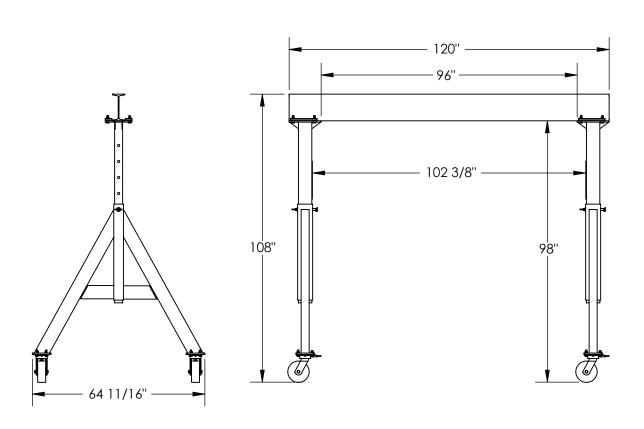

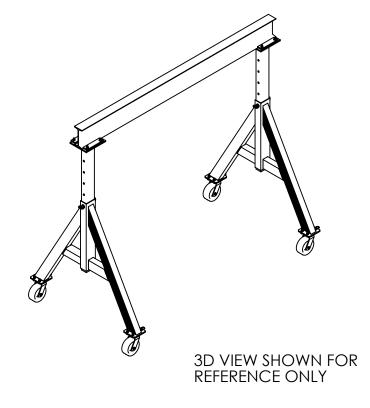

## STANDARD FEATURES

MODEL NUMBER IS AHA-6-10-8
MAX CAPACITY IS 6,000 LBS.
OVERALL BASE WIDTH IS 64 11/16"
OVERALL I-BEAM LENGTH IS 120"
USABLE I-BEAM LENGTH IS 96"
OVERALL HEIGHT IS 108"
UNDER I-BEAM HEIGHT IS 6' 2" TO 8' 2"
10" I-BEAM

STRADDLE I.D. IS APPROX. 102 3/8" CASTERS: (4) Ø8" PHENOLIC SWIVEL WITH FOUR LOCKING POSITIONS

\*\*CAPACITY OF ATTACHMENTS MAY DERATE CAPACITY OF GANTRY CRANE

## SPECIAL FEATURES NONE

**ADDITTIONAL OPTIONS** 

Α

Ρ

Ρ

R

0

V

Α

					.
MANUAL TROLLIES					Δī
1,000 # CAPACII	2,00 (YCAP)	00 # 4CITY	4,000 # CAPACITY	6,000 # CAPACITY	DI
QIT-1	QI	T-2	QIT-4	QIT-6	RF
E-MT-1	E-N	1T-2	E-MT-4	E-MT-6	
E-MT-1-0	C E-M1	-2-C	E-MT-4-C	E-MT-6-C	Q

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ALL SPECIAL UNITS ARE NON-RETURNABLE

[ ] As drawn [ ] As marked

Signed:\_\_\_\_\_Date:\_\_\_\_

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING

P.O.# X

W.O.# X

DRAWN BY: ND

REFERENCE: X

QUOTED LEAD TIME: X

QUOTE #

X