
ADJUSTABLE STEEL GANTRY CRANE - AHS-2-20-12

APPROX WEIGHT: 867.67 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

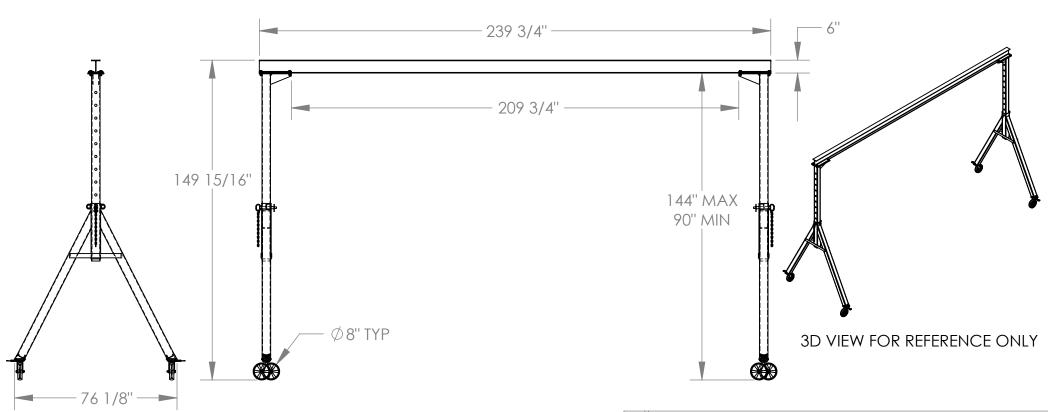

STANDARD FEATURES

MODEL NUMBER IS AHS-2-20-12 CAPACITY IS 2000 LBS. BASE WIDTH IS 76 1/8" OVERALL HEIGHT IS 149 15/16" **OVERALL I-BEAM LENGTH IS 239 3/4"** USABLE I-BEAM LENGTH IS 209 3/4" ADJUSTABLE UNDER I-BEAM HEIGHT 90" MIN. TO 144" MAX. I-BEAM HEIGHT IS 6" CASTERS: (4) 8" X 2" SWIVEL WITH

FOUR LOCKING POSITION

ADDITIONAL OPTIONS

P

P R

O

V

MANUAL TROLLIES		
1,000 # CAPACITIES	2,000 # CAPACITIES	
QIT-1	QIT-2	
E-MT-1	E-MT-2	
E-MT-1-C	E-MT-2-C	

**CAPACITY OF ATTACHMENTS MAY DERATE CAPACITY OF GANTRY CRAMEWN BY: ND

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ALL SPECIAL UNITS ARE NON-RETURNABLE

[] As drawn [] As marked

Signed: Date:

> LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:		P.O.# X
VESTIL MAN	IUFACTURING	W.O.# X
DD AJA/NI DV+	D A TE.	CALEC

Χ

10/1/09 SCALE: 1:45 FILE NAME:

QUOTED LEAD TIME: X QUOTE # 28-007-071