
ADJUSTABLE STEEL GANTRY CRANE - AHS-6-15-12

APPROX WEIGHT: 953.50 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

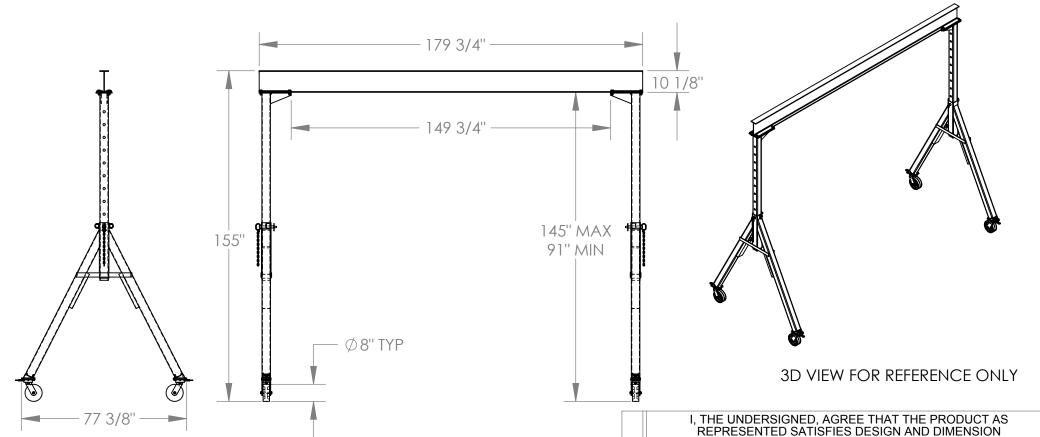

STANDARD FEATURES

MODEL NUMBER IS AHS-6-15-12 CAPACITY IS 6,000 LBS. BASE WIDTH IS 77 3/8" **OVERALL HEIGHT IS 155" OVERALL I-BEAM LENGTH IS 179 3/4"** USABLE I-BEAM LENGTH IS 149 3/4" ADJUSTABLE UNDER I-BEAM HEIGHT - 91" MIN. TO 145" MAX. I-BEAM HEIGHT IS 10 1/8" (4) Ø8" SWIVEL CASTERS WITH FOUR LOCKING POSITIONS

ADDITIONAL OPTIONS

P

P R

0

V

MANUAL TROLLIES		
1,000 #	2,000 #	
CAPACITY	CAPACITY	
QIT-1	QIT-2	
E-MT-1	E-MT-2	
E-MT-1-C	E-MT-2-C	
4,000 #	6,000 #	
CAPACITY	CAPACITY	
QIT-4	QIT-6	
E-MT-4	E-MT-6	
E-MT-4-C	E-MT-6-C	

**CAPACITY OF ATTACHMENTS MAY DERATE CAPACITY OF GANTRY CRANE

REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ALL SPECIAL UNITS ARE NON-RETURNABLE

[] As drawn [] As marked

Signed: Date:

> LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:		P.O.# X
VESTIL MANUFACTURING		w.o.# X
DRAWN BY: ND	10/1/09	SALES: X
reference: X	SCALE: 1:45	
QUOTED LEAD TIME: X	QUOTE #	28-007-082