
ADJUSTABLE STEEL GANTRY CRANE - AHS-8-20-12

APPROX WEIGHT: 1269.20 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

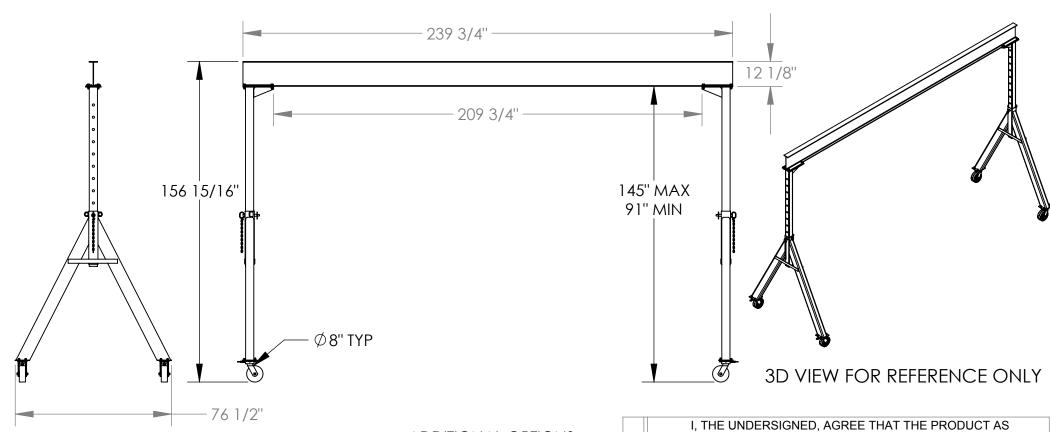

STANDARD FEATURES

MODEL NUMBER IS AHS-8-20-12 CAPACITY IS 8,000 LBS. BASE WIDTH IS 76 1/2" OVERALL HEIGHT IS 156 15/16" OVERALL I-BEAM LENGFH IS 209 3/4" ADJUSTABLE UNDER I-BEAM HEIGHT - 91" MIN. TO 145" MAX. I-BEAM HEIGHT IS 12 1/8" CASTERS: (4) 8" X 3" SWIVEL PHENOLIC WITH FOUR POSITION LOCKING

ADDITIONAL OPTIONS

REQU	Δ			
CONFIR	A P	LIES	NUAL TROL	MA
A	Ρ	4,000 #	2,000 #	1,000 #
ALL SF	Ŕ	CAPACITY	CAPACITY	CAPACITY
/ (0.	O	QIT-4	QIT-2	QIT-1
	V	E-MT-4	E-MT-2	E-MT-1
Signed:	A	E-MT-4-C	E-MT-2-C	E-MT-1-C
	L		8,000 #	6,000 #
LE			CAPACITY	CAPACITY
			QIT-8	QIT-6
BUTOR'S NAME:	DISTRI		E-MT-8	E-MT-6
ESTIL MA	V		E-MT-8-C	E-MT-6-C
		MENTS MAY	TY OF ATTACH	**CAPACI
VN BY:	ノΚΑ۷	*1L1 *10 / *// \ 1	11 01 / (11/ (01)/	C/ (1 / (C)

DERATE CAPACITY OF GANTRY CRANE

REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ALL SPECIAL UNITS ARE NON-RETURNABLE

ALL SPECIAL UNITS ARE NON-RETURNABLE

[] As drawn [] As marked

Signed:_____Date:____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

W.O.# __

VESTIL	MANUFACTURING

		_ ^
RAWN BY: ND	DATE: 10/1/09	SALES: X
EEDENICE:		EILE VIVVE.

Χ

REFERENCE: X SCALE: 1:54 FILE NAME: 28-007-090