
ADJUSTABLE STEEL GANTRY CRANE - AHS-8-20-14

APPROX WEIGHT: 1201.21 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

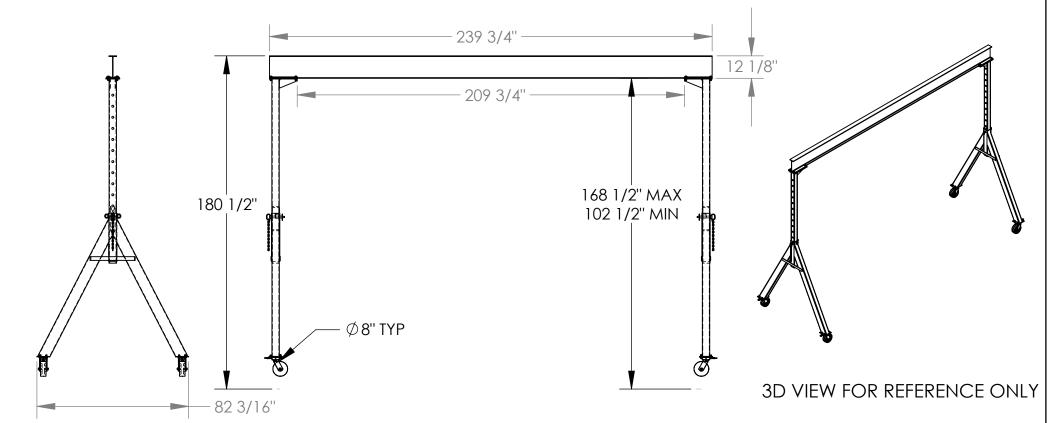

STANDARD FEATURES

MODEL NUMBER IS AHS-8-20-14 CAPACITY IS 8,000 LBS. **BASE WIDTH IS 88 5/16" OVERALL HEIGHT IS 180 1/2"** OVERALL I-BEAM LENGTH IS 239 3/4" USABLE I-BEAM LENGTH IS 209 3/4" ADJUSTABLE UNDER I-BEAM HEIGHT - 102 1/2" MIN. TO 168 1/2" MAX. I-BEAM HEIGHT IS 12 1/8" CASTERS: (4) 8" X 3" SWIVEL PHENOLIC WITH FOUR POSITION LOCKING

	MA	NUAL TROL	LIES	 A	REP REQU CONFIRI
	1,000 #	2,000 #	4,000 # CAPACITY	P P R	ALL SF
	QIT-1	QIT-2	QIT-4		ALL OF
	E-MT-1	E-MT-2	E-MT-4	$\ \breve{v}\ $	
	E-MT-1-C	E-MT-2-C	E-MT-4-C	Ä	Signed:
	6,000 #	8,000 #		L	, ,
	CAPACITY	CAPACITY			LE
	QIT-6	QIT-8			
	E-MT-6	E-MT-8		DISTRI	BUTOR'S NAME:
	E-MT-6-C	E-MT-8-C		V	ESTIL MA
	**CAPACITY OF ATTACHMENTS MAY				VN BY:
ì		CAPACITY OF			MD ND

ADDITIONAL OPTIONS

I. THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ALL SPECIAL UNITS ARE NON-RETURNABLE

[] As drawn [] As marked

Signed: Date:

> LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

> > 28-007-091

VFSTII	MANUFA	ACTURING

W.O.# X DRAWN BY: ND SALES: X 10/1/09

REFERENCE: X SCALE: 1:52 FILE NAME:

Quoted lead time: $_{f Y}$ QUOTE # Χ