
ADJUSTABLE STEEL GANTRY CRANE - AHS-8-15-10 OPEROX WEIGHT: 889.98 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

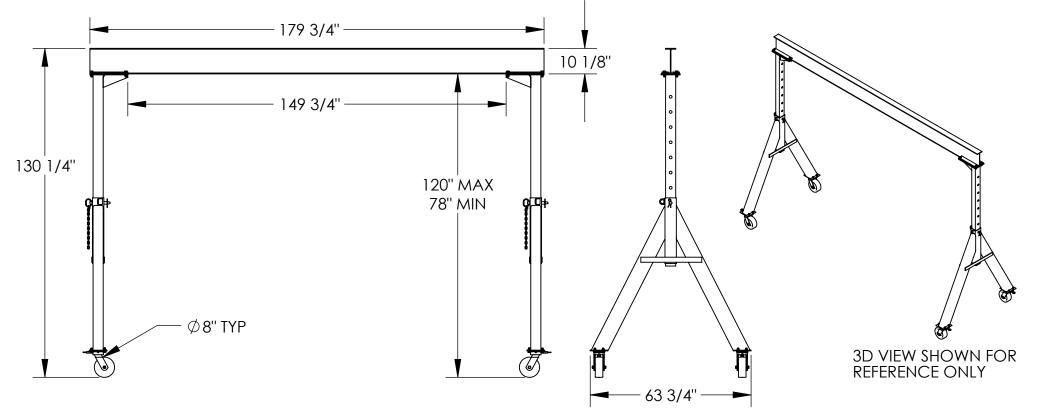

STANDARD FEATURES

MODEL NUMBER IS AHS-8-15-10 CAPACITY IS 8,000 LBS. BASE WIDTH IS 63 3/4" **OVERALL HEIGHT IS 130 1/4" OVERALL I-BEAM LENGTH IS 179 3/4" USABLE I-BEAM LENGTH IS 149 3/4"** ADJUSTABLE UNDER I-BEAM HEIGHT - 78" MIN. TO 120" MAX. I-BEAM HEIGHT IS 10 1/8" CASTERS: (4) 8" X 3" SWIVEL PHENOLIC WITH FOUR POSITION LOCKING

SPECIAL FEATURES

NONE

ADDITIONAL OPTIONS

MANUAL TROLLIES			Ä
1,000 # CAPACITY	2,000 # CAPACITY	4,000 # CAPACITY	P P R
QIT-1	QIT-2	QIT-4	0
E-MT-1	E-MT-2	E-MT-4	$\ \check{v}\ $
E-MT-1-C	E-MT-2-C	E-MT-4-C	Å
6,000 #	8,000 #		L
CAPACITY	CAPACITY		
QIT-6	QIT-8		
E-MT-6	E-MT-8		DISTR
E-MT-6-C	E-MT-8-C] / /
			,

**CAPACITY OF ATTACHMENTS MAY DERATE CAPACITY OF GANTRY CRANE REFERENCE: X

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ALL SPECIAL UNITS ARE NON-RETURNABLE [] As marked [] As drawn

Signed: Date:

> LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

istributor's name:	P.O.# X	
VESTIL MANUFACTURING		W.O.# X
RAWN BY: \	DATE:	SALES:

Χ

ND 10/12/09

SCALE: 1:38 FILE NAME: QUOTED LEAD TIME: Y QUOTF #

28-007-212