
ADJUSTABLE STEEL GANTRY CRANE - AHS-8-15-7 APPROX WEIGHT: 751.04 lbs. \*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

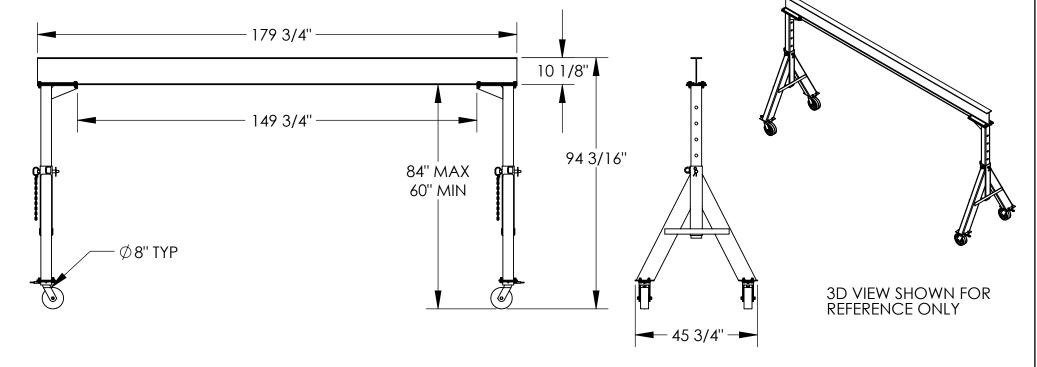

STANDARD FEATURES	ADDITIONAL OPTIONS				I, THE UNDERSI REPRESENTED	) SATÍSFIES	DESIGN AND	DIMENSION
MODEL NUMBER IS AHS-8-15-7	MANUAL TROLLIES			A P		. I ALSO ACKNOWLEDGE MY DUTY TO T AND INSTALLATION COMPLIANCE WI		
CAPACITY IS 8,000 LBS.	1,000 # CAPACITY	2,000 # CAPACITY	4,000 # CAPACITY	P P R	ALL APPLICABLE FEDERAL, STATE AND LOCAL			
BASE WIDTH IS 45 3/4" OVERALL HEIGHT IS 94 3/16" OVERALL I-BEAM LENGTH IS 179 3/4" USABLE I-BEAM LENGTH IS 149 3/4" ADJUSTABLE UNDER I-BEAM HEIGHT - 60" MIN. TO 84" MAX. I-BEAM HEIGHT IS 10 1/8" CASTERS: (4) 8" X 3" SWIVEL PHENOLIC WITH FOUR POSITION LOCKING					REGULATIONS AND STANDARDS. ALL SPECIAL UNITS ARE NON-RETURNABLE			
	QIT-1	QIT-2	QIT-4	Ö		As drawn [] As marked		
	E-MT-1	E-MT-2	E-MT-4	ΙŬ				
	E-MT-1-C	E-MT-2-C	E-MT-4-C	Å	Signed:			Date:
	6,000 # 8,000 #			L	LEAD TIME WILL START UPON RECEIPT			
	CAPACITY			OF SIGNED APPROVAL DRAWING				
	QIT-6	QIT-8						
		E-MT-6 E-MT-8 DISTRIBUTOR'S NAME E-MT-6-C E-MT-8-C V/ECTIL NA			_		<sup>P.O.#</sup> X	
	E-MT-6-C			ESTIL MANUFACTURING		IG	<sup>W.O.#</sup> X	
SPECIAL FEATURES	**CAPACITY OF ATTACHMENTS MAY DERATE CAPACITY OF GANTRY CRANE			DRAV	<sup>NN BY:</sup> ND		/12/09	<sup>SALES:</sup> X
	DERATE CAPACITY OF GA		NIKI CRANE	REFER	RENCE: X		SCALE: 1:36	FILE NAME:
				QUOT	TED LEAD TIME: X	QUOTE #		28-007-214