




Model FR

Locking Type

The **Model FR** is a vertical lifting tool for relatively light work. It is small and easy to handle in capacities through three tons. It incorporates a “Lock Closed” feature which facilitates attaching the clamp to the plate.

MODEL FR EXPLODED VIEW

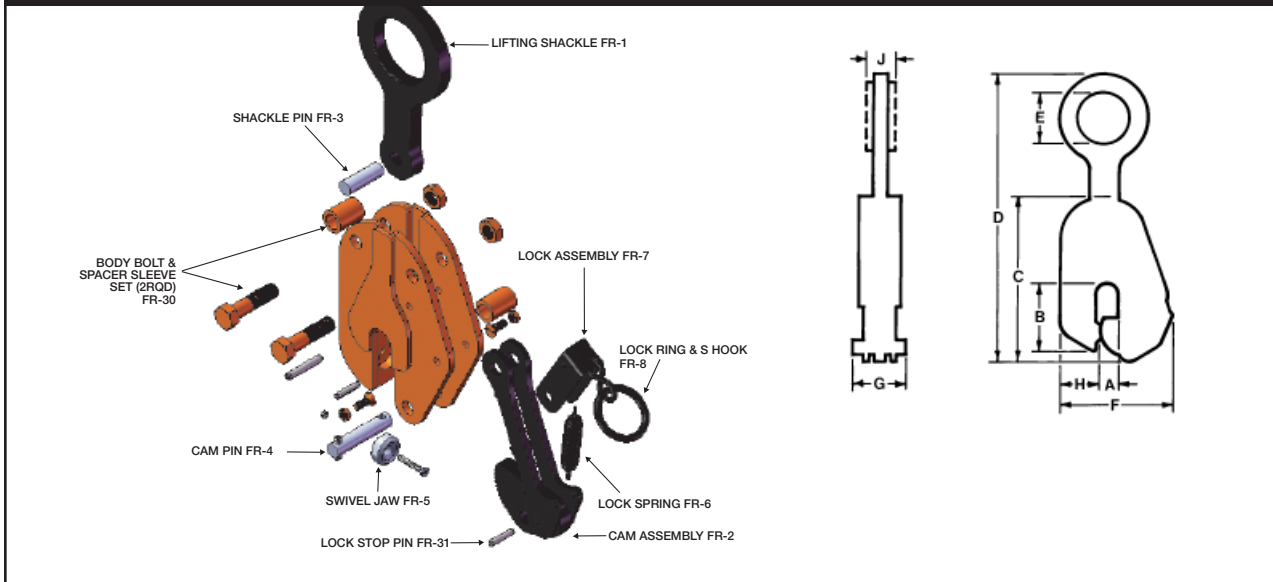

SPECIFICATIONS (in inches)

Rated Capacity Tons	Plate Thickness		C	MAX. D	E	F	G	H	J	Weight (in pounds)
	A	B								
1/2	0-3/4	2 13/16	7	11 1/4	2 3/8	4 5/8	2 1/2	1 1/2	1/2	8
	1/2-1	2 13/16	7	11 1/4	2 3/8	4 7/8	2 1/2	1 1/2	1/2	8
	3/4-1 1/4	2 13/16	7	11 1/4	2 3/8	5 1/8	2 1/2	1 1/2	1/2	9
	1-1 1/2	2 13/16	7	11 1/4	2 3/8	5 3/8	2 1/2	1 1/2	1/2	10
	1 1/4-1 3/4	2 13/16	7	11 1/4	2 3/8	5 5/8	2 1/2	1 1/2	1/2	11
1	0-3/4	3 3/16	9	13 3/4	2 5/8	5 7/8	3 3/16	1 5/8	5/8	14
	1/2-1	3 3/16	9	13 3/4	2 5/8	6 1/8	3 3/16	1 5/8	5/8	15
	3/4-1 1/4	3 3/16	9	13 3/4	2 5/8	6 3/8	3 3/16	1 5/8	5/8	15
	1-1 1/2	3 3/16	9	13 3/4	2 5/8	6 5/8	3 3/16	1 5/8	5/8	16
	1 1/4-1 3/4	3 3/16	9	13 3/4	2 5/8	6 7/8	3 3/16	1 5/8	5/8	17
	1 1/2-2	3 3/16	9	13 3/4	2 5/8	7 1/8	3 3/16	1 5/8	5/8	18
2	0-1	3 1/2	9	16 3/8	3 5/8	6 3/4	3 3/8	2 1/8	3/4	23
	3/4-1 1/2	3 1/2	9	16 3/8	3 5/8	7 1/4	3 3/8	2 1/8	3/4	23
	1 1/4-2	3 1/2	9	16 3/8	3 5/8	7 3/4	3 3/8	2 1/8	3/4	23
	1 3/4-2 1/2	3 1/2	9	16 3/8	3 5/8	8 1/4	3 3/8	2 1/8	3/4	24
3	0-1 1/4	4 3/16	10 3/4	18 3/8	3 5/8	7 5/8	3 9/16	2 7/16	3/4	30
	3/4-1 1/2	4 3/16	10 3/4	18 3/8	3 5/8	7 7/8	3 9/16	2 7/16	3/4	31
	1 1/4-2	4 3/16	10 3/4	18 3/8	3 5/8	8 3/8	3 9/16	2 7/16	3/4	32
	1 3/4-2 1/2	4 3/16	10 3/4	18 3/8	3 5/8	8 7/8	3 9/16	2 7/16	3/4	33

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.