


Wire Rope Bridle Sling

2 Leg – Specification Sheet

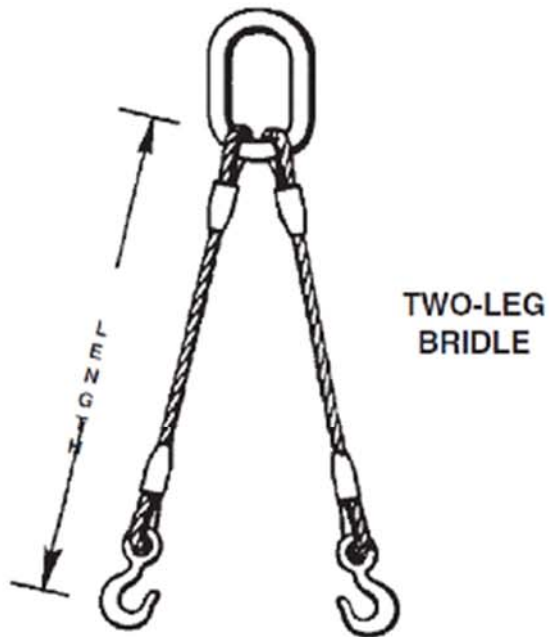

Rope Size (in.)	Recommended Minimum Length	Rated Capacity in tons (2000lbs.)*		
		60°	45°	30°
1/4	1' 6"	1.1	0.9	0.6
5/16	1' 8"	1.7	1.4	1
3/8	1' 10"	2.4	1.9	1.4
7/16	2' 4"	3.2	2.6	1.9
1/2	2' 6"	4.3	3.5	2.5
9/16	2' 10"	5.5	4.5	3.2
5/8	3' 4"	6.7	5.5	3.9
3/4	3' 8"	9.7	7.9	5.6
7/8	4' 4"	12.9	10.6	7.5
1	5'	16.9	13.8	9.8
1-1/8	5' 10"	20.7	16.9	12
1-1/4	6' 6"	25.9	21.2	15
1-3/8	7'	31.1	25.4	18
1-1/2	7' 6"	36.3	29.6	21
1-3/4	9' 2"	48.5	39.5	28