


# Wire Rope Bridle Sling

## 4 Leg – Specification Sheet

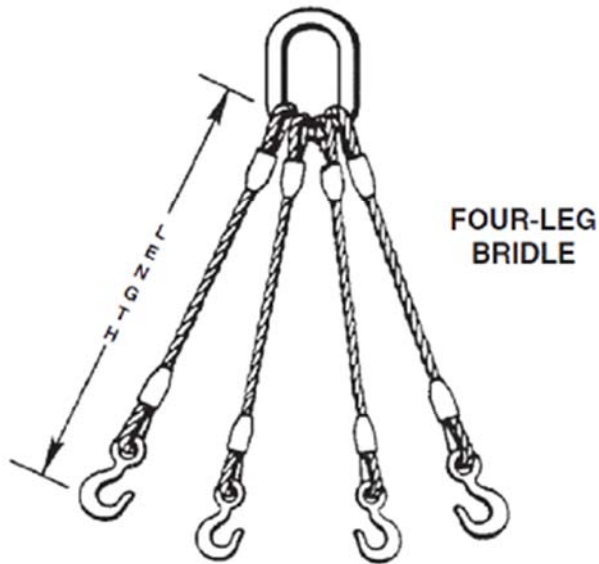

Rope Size (in.)	Recommended Minimum Length	Rated Capacity in tons (2000 lbs.) <sup>a</sup>		
		60°	45°	30°
1/4	1' 6"	2.2	1.8	1.3
5/16	1' 8"	3.4	2.8	2
3/8	1' 10"	4.8	3.9	2.8
7/16	2' 4"	6.5	5.3	3.8
1/2	2' 6"	8.6	7.0	5
9/16	2' 10"	11.0	9.0	6.4
5/8	3' 4"	13.5	11.0	7.8
3/4	3' 8"	19.4	15.8	11.2
7/8	4' 4"	25.9	21.2	15
1	5'	33.9	27.7	19.6
1-1/8	5' 10"	41.5	33.9	24
1-1/4	6' 6"	51.9	42.4	30
1-3/8	7'	62.3	50.9	36
1-1/2	7' 6"	72.7	59.3	42